


DS-2CE16A2P(N)-IT5

700TVL DIS EXIR Bullet Camera




EXIR

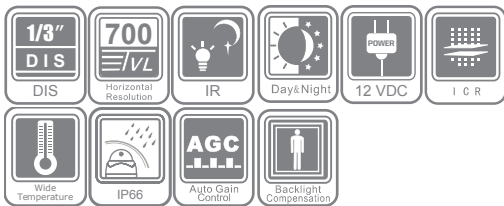

Key features

- 700 TVL Horizontal Resolution
- True Day/Night
- 3.6/6/8/12/16mm Fixed Lens, 0.1 lux /F1.2
- 80m IR Distance
- Wide Operating Temperature Range:
-40°C to 60°C (-40°F to +140°F)

Dimensions

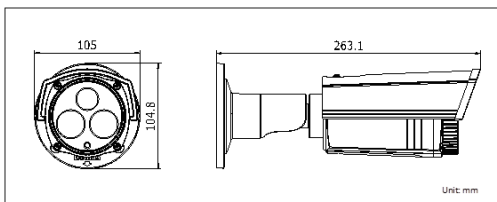

DS-2CE16A2P(N)-IT5	
Camera	
Image Sensor	1/3" DIS
Signal System	PAL/NTSC
Effective Pixels	976 (H) x 496 (V)
Min. Illumination	0.1 Lux @ (F1.2,AGC ON), 0 Lux with IR
Shutter speed	PAL: 1/50 s to 1/100,000 s NTSC: 1/60 s to 1/100,000 s
Lens	3.6mm (6mm,8mm,12mm,16mm optional)
	Angle of view: 68.4° (3.6 mm)
Lens Mount	M12
Day & Night	IR cut filter with auto switch
Horizontal Resolution	700 TVL
Synchronization	Internal synchronization
Video Output	1Vp-p composite output (75 Ω/BNC)
S/N Ratio	More than 62 dB
General	
Working Temperature/Humidity	-40 °C - 60 °C (-40 °F - 140 °F) Humidity 90% or less (non-condensing)
Power Supply	12 V DC
Power Consumption	Max. 5 W
Ingress Protection	IP66
IR Range	80 meters
Dimensions	105x104.8x263.1 mm(4.13"×4.13"×10.36")
Weight	800 g (1.76 lbs)

Available models

PAL: DS-2CE16A2P-IT5
NTSC: DS-2CE16A2N-IT5